# tara<sup>™</sup> whirlpool bath and soaking bath

like the fabled Irish tower of kings that shares its name, the tara™ whirlpool bath is itself a singularly regal experience in an everyday world.



Cozy up to the Tara<sup>™</sup> whirlpool bath's corner configuration and linger as you massage away the cares of the day.

whirlpool bath features:

- 4 Fully adjustable TheraPro<sup>™</sup> jets
- 2 Directionally adjustable AccuPro<sup>™</sup> lumbar jets.
- 1 Directionally adjustable AccuPro<sup>™</sup> foot jet.
- Exclusive Tru-Level<sup>™</sup> base system.
- Slip-resistant bottom.
- Patented Silent Air<sup>™</sup> Induction system.
- Available with built-in tile flange and integral skirt with access panels
- Drain included on whirlpool baths

#### tara<sup>™</sup> whirlpool bath

model number: 8450 RH Pump, B950 LH Pump

exterior dimensions: 60" long x 60" wide x 20<sup>3</sup>/<sub>4</sub>" high

interior dimensions (at bottom): **45" long x 40" wide** 

# of Jets/type of Jets:
4 TheraPro<sup>™</sup> Jets,
2 AccuPro<sup>™</sup> Lumbar Jets,
1 AccuPro<sup>™</sup> Foot Jet

operating gallons: **74 gallons** 

#### tara<sup>™</sup> soaking bath

model number: 9191

exterior dimensions: 60" long x 60" wide x 20¾" high

interior dimensions: 45" long x 40" wide







# Tara<sup>™</sup> Whirlpool Bath Model: B950, 8450 Tara<sup>™</sup> Bath

Model: 9191

## **Ordering Information**


Product Code: 9191 Tara™ Bath 8450 Tara™ Whirlpool Bath Right Hand B950 Tara™ Whirlpool Bath Left Hand

Center Drain Location


 Accessories / Hardware: Trip-Lever Drain Kit #X559 Rotary Trip Kit, 26" Cable: #8730 TheraPro™ Jet Rings Kit: #D095 AccuPro™ Jet Rings Kit (2 required): #P556

• Trim Kit Finishes Available:

- (827) Chrome
- (898) Brushed Chrome
- (815) Satin Nickel
- (829) Bright Brass
- (805) Platinum
- (826) Brushed Nickel
- (849) Oil Rubbed Bronze



Product Shown: Tara™ Corner Whirlpool Bath Model: 8450 \* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.



SIDE VIEW

# Installation Notes

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE. Electrical Components and Electrical Specifications do not apply to non-jetted baths.

## **Technical Specifications**

**Dimensions** 60" L x 60" L x 20-3/4" H (1524 mm) L x (1524 mm) L x (527 mm) H

**Drain/Overflow** A: 16" (406 mm) B: 12-3/8" (314 mm)

#### Cutout

See Illustration Below

#### **Total Weight**

B950, 8450: 984 lb (446 kg) / 39 lb/sq. ft. (192 kg/m<sup>2</sup>) 9191: 942 lb (427 kg) / 38 lb/sq. ft. (184 kg/m<sup>2</sup>)

## **Operating Gallonage**

74 U.S. Gal. (280 Liters) Max. 87 U.S. Gal. (329 Liters)

#### **Product Weight**

B950, 8450: 118 lb (54 kg) 9191: 76 lb (34kg)

### Skirt Mounting


Optional

**Electrical Specifications** Models B950, 8450 only Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 15 AMP, 60 Hz. RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

#### Heater (Optional) Models B950, 8450 only Requires a dedicated GFCI protected separate circuit.

RapidHeat™: P/N S750000

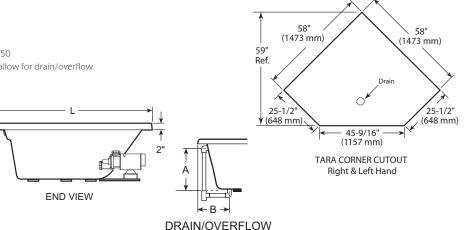

#FS26 06/07